


[illegible]

Technical drawing of the PORTABICI BIFACCIALE (Bicycle Carrier) showing dimensions. The drawing is a top-down view of a rectangular frame with two mounting brackets on the left and right sides. The overall width is 1,560 mm. The overall height is 794 mm. The mounting brackets are 120 mm wide and 240 mm high. The distance between the mounting brackets is 1,560 mm. The distance between the mounting brackets is 1,560 mm. The distance between the mounting brackets is 1,560 mm.

\* Queste caratteristiche sono garantite nel senso longitudinale, nel senso trasversale aumentano di circa 20 N/mm<sup>2</sup>

CARATTERISTICHE DEI MATERIALI	PRESCRIZIONI PER CALCESTRUZZO - UNI 11104:2004 e UNI EN 206-1:2006							
	Campi di impiego	Classi di esposizione ambientale UNI 11104 Prosp.1	UNI 11104 - Prosp. 4 - UNI EN 206-1		Ø max aggregati (mm)	Classe consistenza al getto	Copriferro nominale (cm)	
			Rck (daN/cm²)	Max rapporto a/c				Contenuto minimo cemento (kg/m³)
Fondazione	XC2	300	0,60	300	32	S4	5	
ACCIAIO PER ARMATURE C.A.				ACCIAIO PROFILATI				
Tipo di acciaio	f <sub>yk</sub> (N/mm²)	f <sub>tk</sub> (N/mm²)	Agt (%)	Tipo di acciaio	f <sub>y</sub> (N/mm²)	f <sub>t</sub> (N/mm²)		
B450 C	450	540	7,5	S 275	275	430		

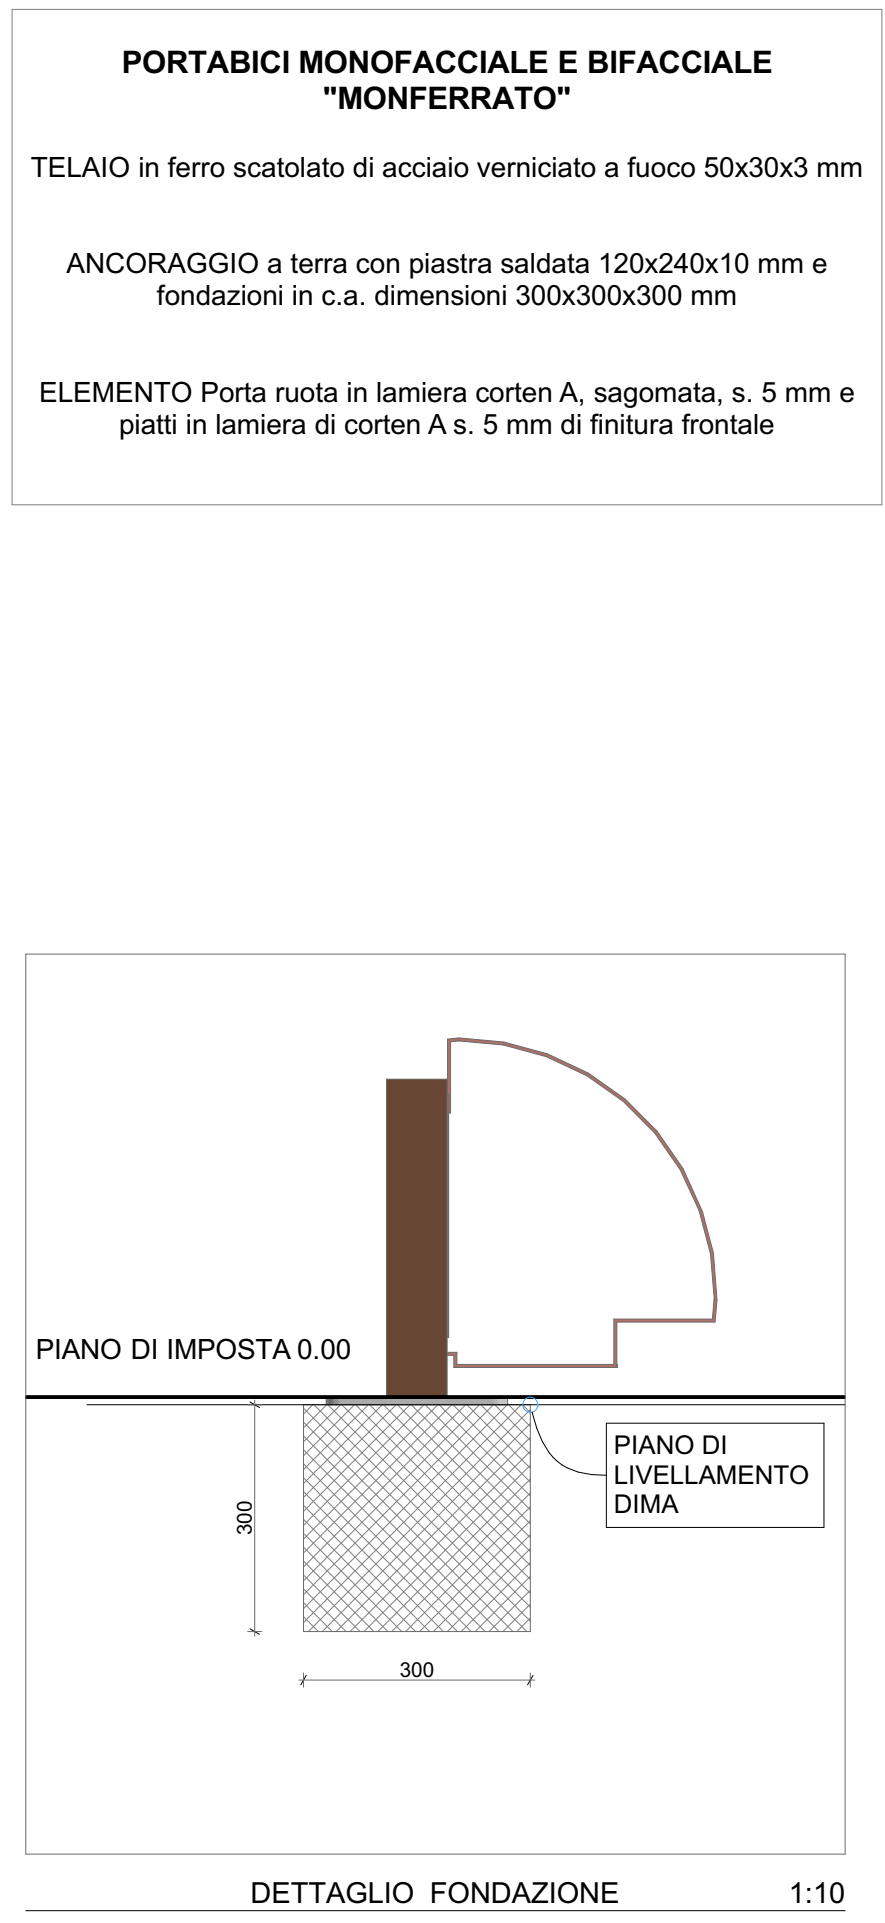